



Motorfan data / Данные вентилятора 230V/1/50 Hz

MODEL МОДЕЛЬ	Capacity (kW) Мощность (кВт)	Air flow (m3/h) Поток воздуха (м3/ч)	Watt / Вт	Ampere Ампер	Fan number Количество вентиляторов	Fan diameter (mm) Диаметр вентилятора (мм)	Surface (m2) Поверхность (м2)	internal volume (dm3) Внутренний объем (дм3)	Weight (Kg) Вес (Кг)
SCM431643	4,3	2100	150	0,75	1	350	7,3	1,9	10
SCM441643	5	1850	150	0,75	1	350	9,8	2,5	11
SCM451643	5,4	1650	150	0,75	1	350	12,2	3,1	12
SCM432063	7,53	3400	190	0,9	1	400	13,4	3,4	14
SCM442063	8,9	3200	190	0,9	1	400	17,9	4,6	15
SCM452063	9,83	3000	190	0,9	1	400	22,4	5,7	16
SCM432255	9,36	5200	250	1,2	1	450 4P	12,9	3,3	16
SCM442255	11,3	4800	250	1,2	1	450 4P	17,2	4,4	17
SCM452255	12,28	4300	250	1,2	1	450 4P	21,5	5,5	18
SCM632255	7,54	3500	150	0,72	1	450 6P	12,9	3,3	16
SCM642255	8,56	3100	150	0,72	1	450 6P	17,2	4,4	17
SCM652255	9,25	2800	150	0,72	1	450 6P	21,5	5,5	18
SCM431682	9,2	4600	150	0,75	2	350	14,0	3,3	20
SCM441682	11,1	4400	150	0,75	2	350	18,7	4,4	22
SCM451682	12,3	4100	150	0,75	2	350	23,3	5,5	24
SCM442282	13,9	5200	150	0,75	2	350	25,7	6,0	30
SCM452282	15,2	4800	150	0,75	2	350	32,1	7,5	34
SCM4320100	13,2	6300	190	0,9	2	400	21,3	5,0	30
SCM4420100	15,5	5800	190	0,9	2	400	28,4	6,6	32
SCM4520100	17,3	5500	190	0,9	2	400	35,6	8,3	34
SCM4326100	19,8	10400	250	1,2	2	450 4P	27,7	6,5	34
SCM4426100	23,3	9500	250	1,2	2	450 4P	37,0	8,6	39
SCM4526100	26,2	9000	250	1,2	2	450 4P	46,2	10,8	44
SCM6326100	16,2	7500	150	0,72	2	450 6P	27,7	6,5	34
SCM6426100	19,15	7000	150	0,72	2	450 6P	37,0	8,6	39
SCM6526100	21,1	6500	150	0,72	2	450 6P	46,2	10,8	44

Motorfan data / Данные вентилятора 400V/3/50 Hz

MODEL МОДЕЛЬ	Capacity (kW) Мощность (кВт)	Air flow (m3/h) Поток воздуха (м3/ч)	Watt / Вт	Ampere Ампер	Fan number Количество вентиляторов	Fan diameter (mm) Диаметр вентилятора (мм)	Surface (m2) Поверхность (м2)	internal volume (dm3) Внутренний объем (дм3)	Weight (Kg) Вес (Кг)
SCM4330130	28,57	14800	420	0,85	2	500 4P	41,6	9,7	36
SCM4430130	34,5	13800	420	0,85	2	500 4P	55,5	13,0	45
SCM4530130	38,56	12800	420	0,85	2	500 4P	69,3	16,2	54
SCM6330130	22,95	10500	220	0,62	2	500 6P	41,6	9,7	36
SCM6430130	27,65	10000	220	0,62	2	500 6P	55,5	13,0	45
SCM6530130	30,6	9300	220	0,62	2	500 6P	69,3	16,2	54
SCM6532150	45,9	15500	500	1,4	2	630 6P	85,3	19,9	65
SCM6632150	49,45	14500	500	1,4	2	630 6P	102,4	23,9	75
SCM6640150	58,4	16800	500	1,4	2	630 6P	128,0	29,9	100
SCM4640150	80,9	27000	850	1,6	2	630 4P	128,0	29,9	100

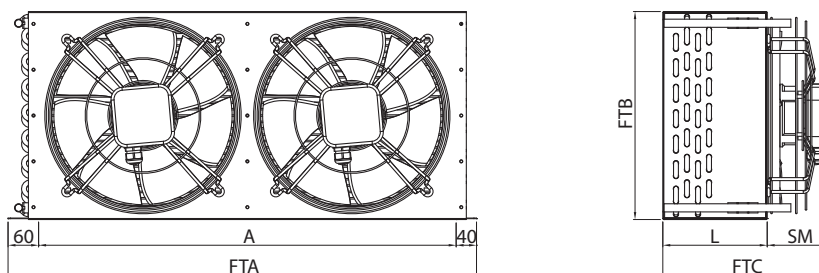

MODEL МОДЕЛЬ	A	FTA	FTB	L	SM	FTC	Connections Подключения
SCM431643	430	530	400	205	305	510	16 - 16
SCM441643	430	530	400	205	305	510	16 - 16
SCM451643	430	530	400	205	305	510	16 - 16
SCM432063	630	730	500	225	325	550	16 - 16
SCM442063	630	730	500	225	325	550	16 - 16
SCM452063	630	730	500	225	325	550	16 - 16
SCM432255	550	650	550	225	375	600	16 - 16
SCM442255	550	650	550	225	375	600	16 - 16
SCM452255	550	650	550	225	375	600	16 - 16
SCM632255	550	650	550	225	375	600	16 - 16
SCM642255	550	650	550	225	375	600	16 - 16
SCM652255	550	650	550	225	375	600	16 - 16
SCM431682	820	920	400	205	305	510	16 - 16
SCM441682	820	920	400	205	305	510	16 - 16
SCM451682	820	920	400	205	305	510	16 - 16
SCM442282	820	920	550	205	305	510	16 - 16

SCM452282	1000	1100	550	205	305	510	16 - 16
SCM4320100	1000	1100	500	225	325	550	16 - 16
SCM4420100	1000	1100	500	225	325	550	16 - 16
SCM4520100	1000	1100	500	225	325	550	16 - 16
SCM4326100	1000	1100	650	225	325	550	22 - 16
SCM4426100	1000	1100	650	225	325	550	22 - 16
SCM4526100	1000	1100	650	225	325	550	22 - 16
SCM6326100	1000	1100	650	225	325	550	22 - 16
SCM6426100	1000	1100	650	225	325	550	22 - 16
SCM6526100	1000	1100	650	225	325	550	22 - 16
SCM4330130	1300	1400	750	225	375	600	28- 22
SCM4430130	1300	1400	750	225	375	600	28- 22
SCM4530130	1300	1400	750	225	375	600	28- 22
SCM6330130	1300	1400	750	225	375	600	28- 22
SCM6430130	1300	1400	750	225	375	600	28- 22
SCM6530130	1300	1400	750	225	375	600	28- 22
SCM6532150	1500	1600	800	225	375	600	28- 22
SCM6632150	1500	1600	800	225	375	600	35 - 28
SCM6640150	1500	1600	1000	225	375	600	35 - 28
SCM4640150	1500	1600	1000	225	375	600	35 - 28